

### Mobile cable powered transfer carriage

**KPT** type is powered by the **mobile cable** laid on the ground directly. For its simple structure, the price is more competitive. Its running distance can be as long as **200m**.




The mobile cable supplies **380v** electricity to the **AC motor** to drive car. According to its load capacity, it can be **single driven** or **dually driven**. It means it can be equipped with one motor or two motor.



Wheels of different models are applied according to your different load requirements. We choose diameters of **300mm, 400mm, 500mm** or else.

[www.transfer-cart.com](http://www.transfer-cart.com) Tel:86 373 5921456 Fax:86 373 3020456 Email:sale@transfer-cart.com

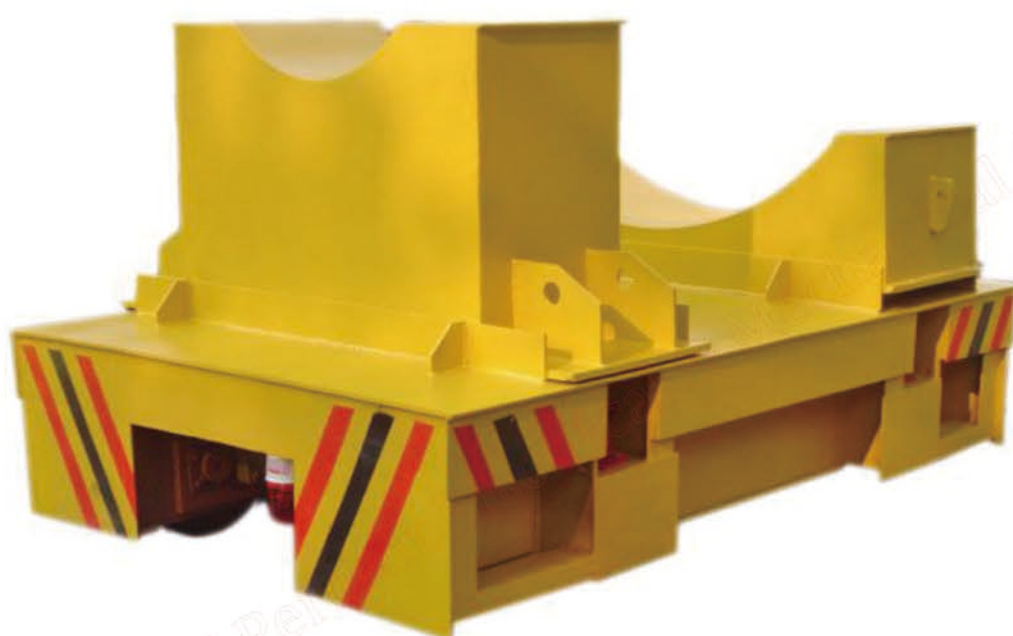

#### Technical Parameters

Model		KPT-2t	KPT-16t	KPT-25t	KPT-40t	KPT-63t
Rated load(t)		2	16	25	40	63
Table size(mm)	Length	2000	4000	4500	5000	5600
	Width	1500	2000	2200	2500	2500
	Height	450	500	600	650	750
Wheel base(mm)		1200	2800	3200	3800	4300
Rail Inner Gauge (mm)		1200	1435	1435	1435	1435
Wheel Diameter(mm)		Φ270	Φ350	Φ400	Φ500	Φ600
Wheel Quantity		4	4	4	4	4
Ground Clearance (mm)		50	50	50	50	75
Running speed(min)		25	20	20	20	20
Motor Power(Kw)		0.8	2.2	3	5.5	7.5
Max Wheel Load(KN)		14.4	64.5	94.5	142.8	221.4
Reference Weight(t)		2.3	5	6	7.2	10.3
Recommended Rail Model		P15	P24	P38	P43	P50

**Options:** length and width, motor power, wheels, electrical parts are selected for your specific needs.

[www.transfer-cart.com](http://www.transfer-cart.com) Tel:86 373 5921456 Fax:86 373 3020456 Email:sale@transfer-cart.com